



# POWER AND ENERGY



## Developing a Methodology for the Evaluation of Hybrid Vehicle Thermal Management Systems

Stanley T. Jones, Ph.D. SAIC

John Mendoza, Ph.D. SAIC

George Frazier, SAIC

Ghassan Khalil, TARDEC

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE <b>17 JUL 2009</b>		2. REPORT TYPE <b>N/A</b>		3. DATES COVERED <b>-</b>	
4. TITLE AND SUBTITLE <b>Developing a Methodology for the Evaluation of Hybrid Vehicle Thermal Management Systems</b>				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) <b>Stanley T. Jones; John Mendoza; George Frazier; Ghassan Khalil</b>				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>US Army RDECOM-TARDEC 6501 E 11 Mile Rd Warren, MI 48397-5000</b>				8. PERFORMING ORGANIZATION REPORT NUMBER <b>20074</b>	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S) <b>TACOM/TARDEC</b>	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) <b>20074</b>	
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release, distribution unlimited</b>					
13. SUPPLEMENTARY NOTES <b>Presented at NDIAs Ground Vehicle Systems Engineering and Technology Symposium (GVSETS), 17 22 August 2009, Troy, Michigan, USA, The original document contains color images.</b>					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT <b>SAR</b>	18. NUMBER OF PAGES <b>15</b>	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			

- How can we define a vehicle thermal management system (TMS) evaluation metric?
  - Performance
    - Does it meet the demand of maximum load at worst case boundary conditions?
    - Is the TMS operational power demand (hotel load) disproportionately large?
  - Size – is TMS disproportionately oversized in terms of:
    - Volume
    - Weight
- An evaluation metric structure could be developed that would -
  - Provide a means for comparison for and/or across classes of vehicles
  - Evaluate design maturity and point toward potential issues
  - Identify significant technological advancements



# Vehicle TMS Definition?

## POWER AND ENERGY



- Vehicle Thermal Management System design requires intimate knowledge of vehicle:
  - Architecture – components and layout
  - Demand – component loading and boundary conditions
- Component-level cooling equipment needs to be included in estimates of component power density
  - Engine components: oil coolers and pumps, charge air coolers, water and fuel pumps, fuel coolers
  - Auxiliary components: closed loop specialized cooling equipment
  - Total volume must include ancillary non-system components like electrical wiring and connectors, plumbing fittings, etc. (i.e. not just shrink-wrapped volume)
- Vehicle packaging considerations may sometime make evaluation difficult
  - Component-level versus System-level thermal equipment
  - Plumbing considerations – valves, fittings, lines, etc.
- Specialized payloads and architectural outliers would need to be handled separately



## Procedural Example...

# POWER AND ENERGY




- Assumed baseline case demonstrates calculation of proposed metrics
  - Chosen climatic conditions: Category A1 – Hot Dry: 49°C ambient
  - Other climatic/operational conditions will yield metric values that can be tabulated
- Proposed metrics allow comparison/evaluation of competing vehicle TMS
- Other evaluation factors need to be considered for final judgment
  - Total cost: includes component and installation costs
  - Robustness: ease of/improvement in installation/operation
  - Readiness: maturity of component as well as availability

# Baseline Case - Assumptions

## POWER AND ENERGY


- Assume a generic layout of a 30-ton full hybrid electric vehicle
- Assume engine components are packaged to the engine block (oil pump, oil cooler, water pump, fuel cooler, etc)
- Assume engine operates on air-to-air charge air cooler and is considered “component-level” equipment
- Assume a sub-ambient cooling system is not required
- Consider mobility loads only – mission electronics, ambient solar, and human occupancy are considered negligible
- Packaging optimization is currently neglected
- Loading Condition (31 ton, 7 m<sup>2</sup> frontal area, C<sub>D</sub> = 0.8, 35 lb/ton rolling resistance)
  - 40 mph continuous up a 5% grade (0.074 TE)
  - 55 mph continuous flat (0.026 TE)
  - Select vehicle tractive power ratio as 15 kW/ton
- Vehicle weight of 30 ton leads to tractive power of 450 kW (225 kW per side)

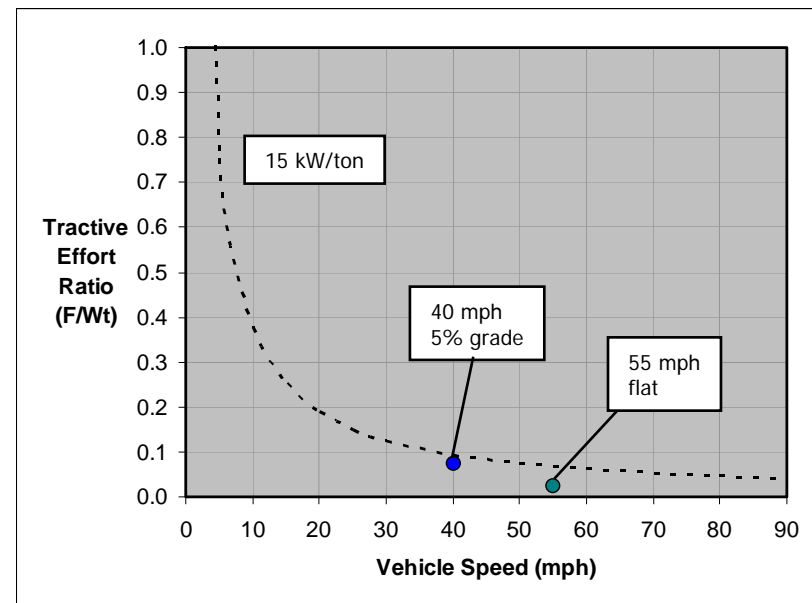

# Baseline Case – Energy Balance

POWER AND  
ENERGY


- Assume a generic hybrid system
  - DC Bus distribution
  - Prime power generation: 500 hp
  - Energy storage system linked through DC/DC Converter
  - Tractive power (mechanical demand) of 225 kW per side
  - Auxiliary Cooling Pump (5 hp assumed)
  - Cooling Fan
  - 95% efficiency assumed for every component
- Solution Methodology
  - Fan power calculated 34 kW *[determination will be discussed in upcoming slide]*
  - Energy balance performed on DC Bus
  - Electronic component and motor thermal loads calculated

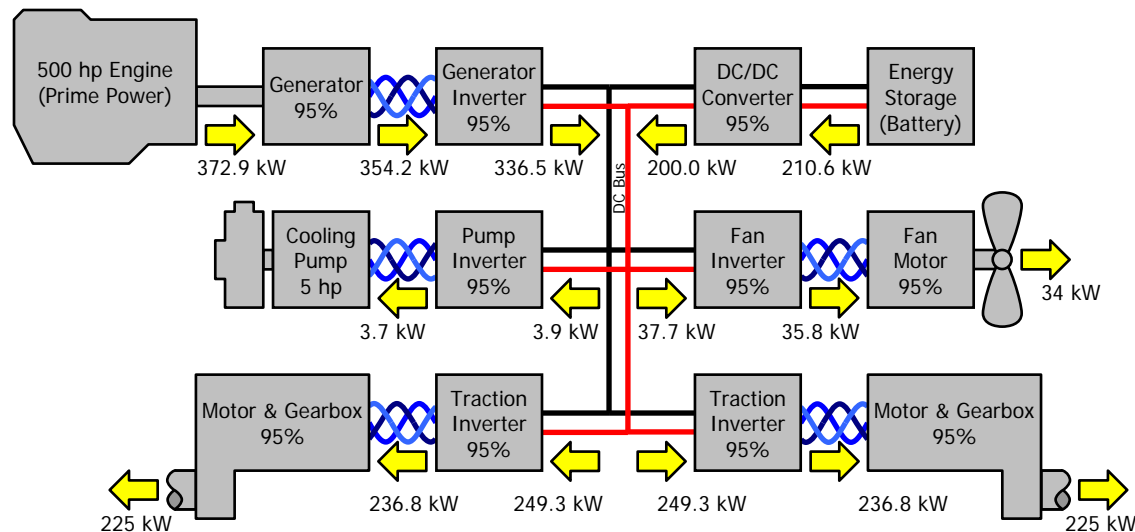

# Baseline Case – Thermal Audit

## POWER AND ENERGY


- Energy Balance gives loads for electronic components & motors
  - Cooling pump/inverter assumed air-cooled
  - Batteries assumed air-cooled
  - Electronics and motors assumed water-cooled (EGW/PGW)
- Representative engine loading to TMS
  - Engine block (86.2 kW)
  - Oil cooler (53.6 kW)
  - CAC assumed packaged with engine (air-to-air)
- Two cooling circuits
  - Low temperature circuit addresses electronics and motors (102.9 kW total)
  - High temperature circuit addresses engine needs (139.8 kW total)

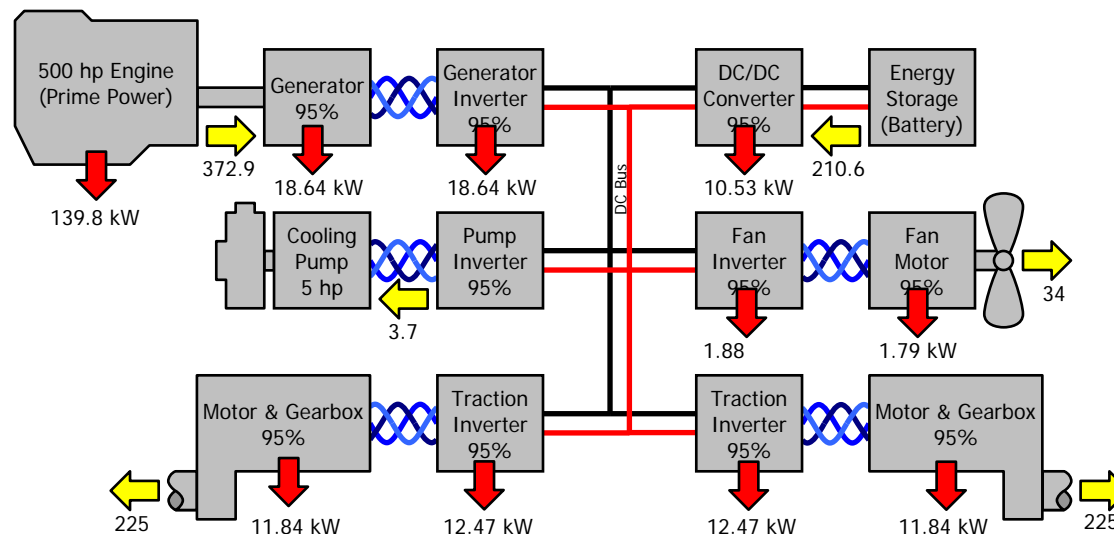

# Baseline Case – TMS Layout

## POWER AND ENERGY


- Two cooling circuits
  - Low temperature circuit addresses electronics and motors (102.9 kW total)
  - High temperature circuit addresses engine needs (139.8 kW total)
- All components on low temperature circuit plumbed in parallel with 70°C maximum allowable supply coolant temperature
- Low temperature coolant flow rate assumed to be 40 gpm
- High temperature coolant supplied by engine cooling pump (component-level thermal equipment)
- High temperature coolant flow rate assumed 80 gpm with 110°C maximum allowable supply temperature
- Heat exchangers assumed in series with respect to cooling air
- Climatic Conditions: Category A1 – Hot Dry: 49°C ambient

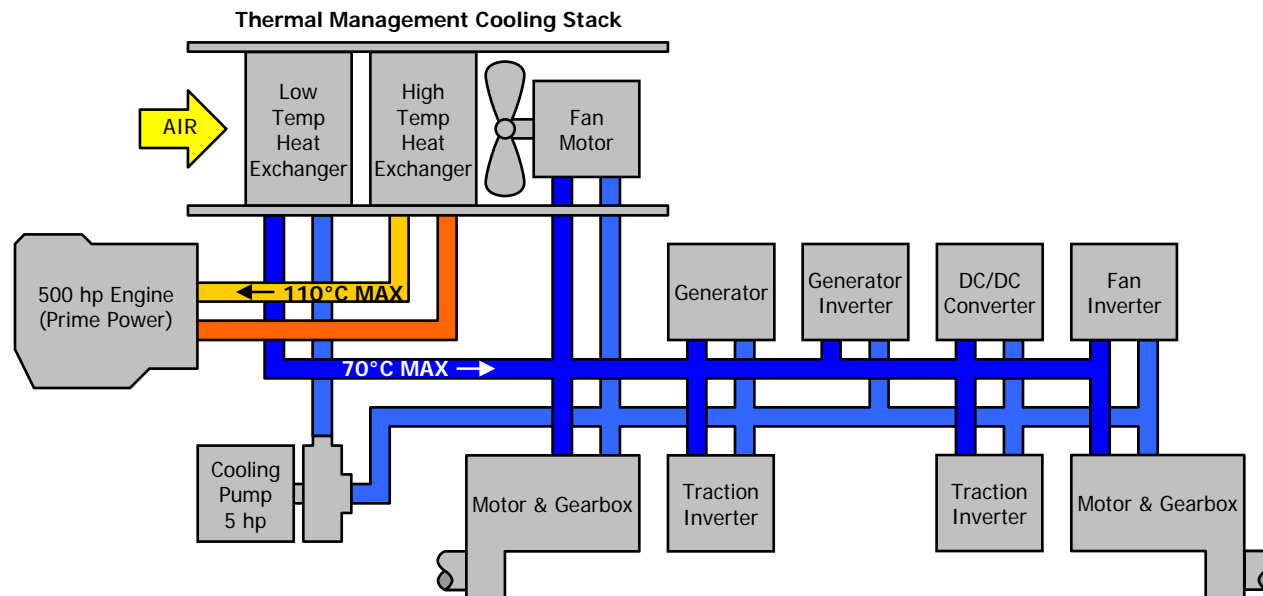


# Baseline Case – TMS Sizing

## POWER AND ENERGY

- Determine heat exchanger stack size through knowledge of load and HX core performance
  - Stanton number correlation establishes heat transfer for a specific core geometry
  - Establishes core size (frontal area, depth and flow requirements)
- Establish expected air pathway pressure head loss
  - Friction factor correlation for HX core
  - Ducting pathway
  - Inlet/exhaust ballistic grill contributions
- Check pressure demand against fan performance curves
- Re-estimate fan power demand and check against energy balance calculations
- Iterate Steps 1-4 as necessary to generate convergence

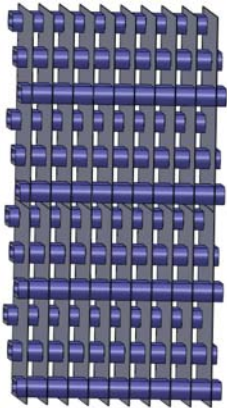

Common Staggered Flattened Tube  
Extended Fin Core Arrangement

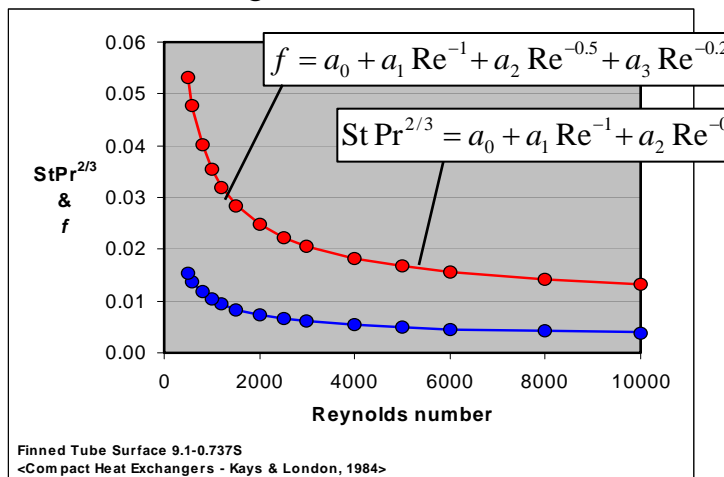

Constant s	f	StPr <sup>2/3</sup>
a <sub>0</sub>	0.0096	0.0048
a <sub>1</sub>	8.2596	1.0171
a <sub>2</sub>	0.8230	0.3837
a <sub>3</sub>	-0.0338	-0.0301


Friction Factor & Stanton Number  
Correlation Coefficients

Surface Designation	Tube Arrangement	Fin Type	Tube Length (parallel to flow)		Tube Width (normal to flow)		Fins/in	Hydraulic Diameter		Fin Thickness		Free Flow/Frontal Area	Heat Transfer Area/Total Volume		Fin Area/Total Area
			in	10 <sup>-3</sup> m	in	10 <sup>-3</sup> m		ft	10 <sup>-3</sup> m	ft	10 <sup>-3</sup> m		ft <sup>2</sup> /ft <sup>3</sup>	m <sup>2</sup> /m <sup>3</sup>	
9.1-0.737S	Staggered	Plain	0.737	18.7	0.100	2.5	9.1	0.01380	4.21	0.004	0.102	0.788	224	735	0.813


Baseline Heat Exchanger Geometrical Properties <Compact Heat Exchangers – Kays & London, 1984>

# Baseline Case – Heat Exchanger Performance Evaluation

**POWER AND ENERGY**

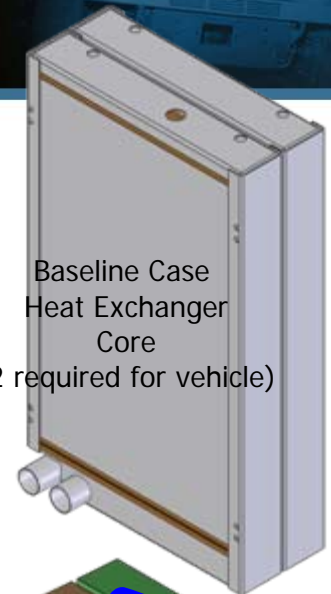

Baseline Case  
Heat Exchanger  
Core  
(2 required for vehicle)

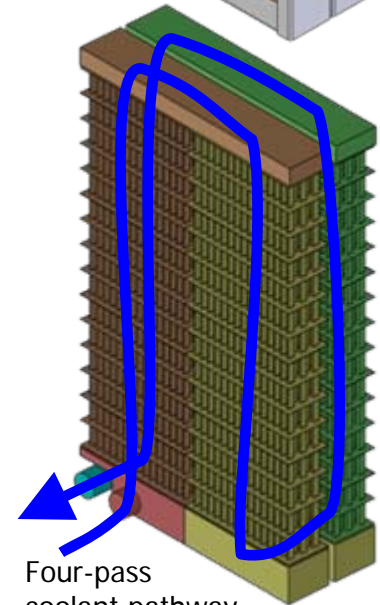

Four-pass  
coolant pathway



- Heat exchanger performance evaluation based upon assumed packaging restrictions
  - Two heat exchangers in series with respect to air flow (i.e. – heat exchangers share common air flow)
  - Plumbing considerations impose a four-pass heat exchanger layout
- Assumed vehicle packaging considerations impose width restriction (mounted on vehicle sponson or similar)
- Analysis based upon core performance correlations (Stanton #) for baseline heat exchanger aspect ratio dictates:
  - Approximately 10,000 CFM airflow requirement to meet heat rejection needs
    - 49°C ambient dry air (no humidity corrections included)
    - Low temperature core heat rejection of 102.9 kW
    - High temperature core heat rejection of 139.8 kW
  - Air flow assumed uniform and well-mixed between heat exchanger core sections
  - Heat exchanger cores assumed clean (no internal/external fouling) and tube wall conduction resistance is negligible

# Baseline Case – TMS Design Point Operations

# POWER AND ENERGY




- Heat exchanger core performance correlation (friction factor) establishes estimated pressure drop as a function of air flow
  - For 10,000 CFM each core loses approximately 6.5 inH<sub>2</sub>O
- Airflow pathway may include ballistic grills, heat exchanger cores and flow routing ductwork
  - Actual performance would require detailed CFM analysis – for this case we've assumed a heat exchanger stack performance curve (shown on figure at right)
- Stack performance curve (pressure as a function of flow rate) is mapped against fan curve(s) to establish operational design point
  - 10,000 CFM flow rate
  - 6000 RPM fan speed
  - 34 kW fan power consumption**

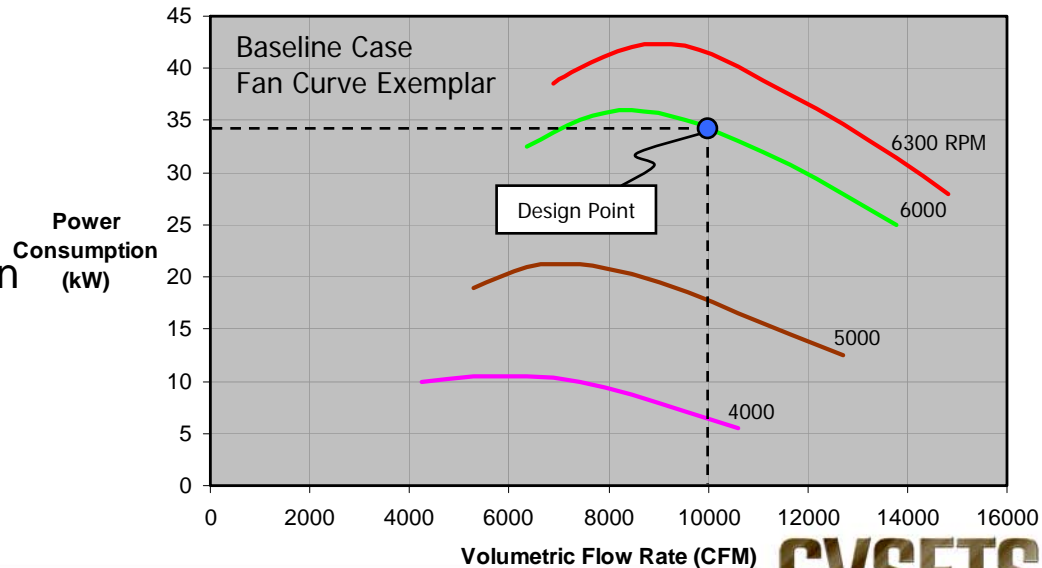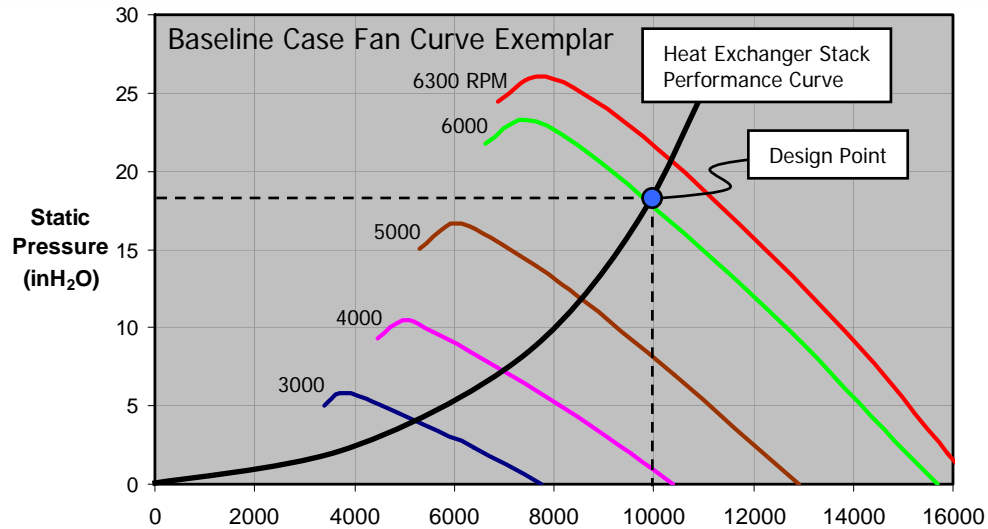



- Identify component-level TMS equipment versus system-level equipment
- Evaluate packaging envelope as it impacts the vehicle
  - Includes overall vehicle size impact rather than just the volume of the component (not a shrink-wrapped solution)
  - ‘Round component in a vehicle’s square hole’ effect
  - May become extremely significant when considering plumbing runs, fittings, valves etc.
- Components to be included in weight & volume estimates
  - TMS components to include heat exchangers, pumps, fans, controllers, reservoirs, plumbing, ductwork, grills, and coolant inventory
- Baseline system estimates:
  - TMS Volume 30 ft<sup>3</sup>
  - TMS Weight 1100 lbs

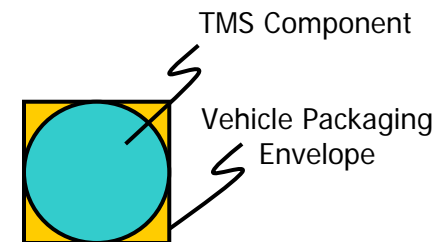

# Baseline Case with Proposed TMS Metrics

## POWER AND ENERGY



- **Packaging Metric** – Audit of TMS component size and weight
  - Compare cumulative TMS component size/weight to:
    - Vehicle mobility component size/weight audit
    - Overall vehicle size/weight
- **Hotel Load Metric** – Audit of vehicle TMS comparing hotel load to deliverable vehicle tractive power
  - Baseline case – 3.7 kW pumping power, 34 kW fan power, 450 kW deliverable tractive
- **Thermal Load Metric** – Audit of vehicle thermal load to deliverable tractive power
  - Baseline case: LT=102.9 kW, HT = 139.8 kW, 450 kW deliverable tractive
- **Operational Thermal Margin** – Comparison of maximum heat rejection capability to design point
  - Baseline Case – design point heat rejection 242.7 kW
  - Maximum Capability – estimated at 253 kW

$$TMS\ Weight\ Metric = \frac{TMS\ Weight}{Vehicle\ Weight} = \frac{(1100 / 2000)}{30\ ton} \times 100 = 1.8\%$$

$$Hotel\ Load\ Metric = \frac{Thermal\ Hotel\ Load}{Tractive\ Power} = \frac{(3.7 + 34)}{450} \times 100 = 8.4\%$$

$$Thermal\ Load\ Metric = \frac{Vehicle\ Thermal\ Load}{Tractive\ Power} = \frac{(102.9 + 139.8)}{450} \times 100 = 53.9\%$$

$$Operational\ Thermal\ Margin = \frac{Maximum - Design\ Point\ Load}{TMS\ Maximum\ Capability} = \frac{(253 - 242.7)}{253} \times 100 = 4.1\%$$



- Proposed metrics result in quantitative descriptors for vehicle TMS
  - Other climatic conditions/operational points will yield different metric values
  - Comparison of metrics from other TMS designs generates quantitative comparison of systems
  - Component-level changes can be evaluated by comparing resulting system metrics (i.e. trade-offs)
- Operational margin allows fine-tuning
  - Large margin can be used to justify component-level changes to save cost/weight/volume at expense of TMS performance
  - Small margin signals requirement for improved component and system-level performance



- **Conceptual Vehicles**

- Packaging Metric
- Hotel Load Metric
- Thermal Load Metric
- Operational Thermal Margin

- **Existing Vehicles**

- Evaluate Packaging Metric
- Hotel Load Metric
- Thermal Load Metric
- Establish performance limitations through operational data to evaluate operational thermal margin (if any) and/or performance deficits

- **Evaluating Component Alterations**

- Easily identify packaging implications
- Operational setpoint evaluations (e.g. – impact of higher operating temperature)
  - Needs model (as was developed for baseline case) to evaluate
  - May impose system layout changes (e.g. – series vs parallel)